

HERITAGE 47 WINDOW ORDER/QUOTE FORM

Please tick for quote only Page ___ of

Aluminium Direct Fax: 01453 827801 E-mail Orders: sop@customade.co.uk

Company Name (Acc No): _____

Signature: _____

Preferred Delivery Date: _____

Print Name: _____

Order Ref: _____

Date: _____ E-mail confirmation: _____

(Please tick) Fixed panes Dummy sashes

Note: 28mm glazing only
 : Sashes are internally beaded and fixed panes are externally beaded as standard unless Dummy sashes are selected
 : If a door is being coupled to a Heritage 47 window please note flush couplers are not compatible

Please Circle Items Required

Please Circle/Tick Items Required

(Q) = Selection may need to be upgraded to meet Part Q
Part Q Compliant: Y / N
Colour: White (G) / Grey (7016M) / Black (9005M) / Dual Grey Ex (M) & White Int (G)
Standard Handle Colour: White / Black / Grey / Satin Silver / Antique Black (Monkey tail) / (Bulb)
Art Deco Handle: Black / White / Brass / Satin Nickel
Trickle Vent Colour: White / Black / Grey / Silver / Grey on white
 Trickle vent widths 2700mm2 =300mm, 4000mm2=400mm and 5000mm2=600mm
Drainage: Face / Concealed


Glass Supply: YES / Unglazed

Tick which is required:
 Window Energy Rating B
 (1.2 centre pane U value 0.73 G value)

Window U Value 1.6
 (1.1 Centre pane U value)

Astragal Bar 25mm Flat bar
 (Please draw layout)

Note: Peg stays not available

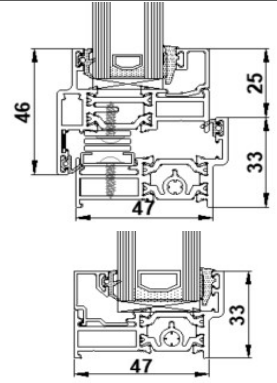

Hinge codes: S=Standard / E=Egress easy / R=Restrictor / RE=Restrictor Egress (TRI R90)

T/V Trickle vents requires 42mm add-on, fixed to the top of the window

| Location | Design (viewed outside, please show T/vents and mullion/trans dimensions) | Qty | Sizes (mm) Including Cills & Add-ons | | Cill | Hinge | | Glass Spec (Tgh, Obs, Lead) | Addons 20mm 42mm (42mm required with trickle vents) | | Special Requirements |
|----------|---|-----|--------------------------------------|--|-----------|-------|----|-----------------------------|---|---|----------------------|
| | | | | | | S | E | | T | B | |
| | | | W | | None | S | E | | T | | |
| | | | | | 85 | R | RE | | B | | |
| | | | H | | 150 | | | | L | | |
| | | | | | 190 / 225 | | | | R | | |
| | | | W | | None | S | E | | T | | |
| | | | | | 85 | R | RE | | B | | |
| | | | H | | 150 | | | | L | | |
| | | | | | 190 / 225 | | | | R | | |
| | | | W | | None | S | E | | T | | |
| | | | | | 85 | R | RE | | B | | |
| | | | H | | 150 | | | | L | | |
| | | | | | 190 / 225 | | | | R | | |
| | | | W | | None | S | E | | T | | |
| | | | | | 85 | R | RE | | B | | |
| | | | H | | 150 | | | | L | | |
| | | | | | 190 / 225 | | | | R | | |

| Location | Design (viewed outside , please show T/vents and mullion/trans dimensions) | Qty | Sizes (mm) Including Cills & Add-ons | | Cill | Hinge | Glass Spec (Tgh, Obs, Lead) | Addons 20mm 42mm (42mm required with t/vents) | | Special Requirements |
|----------|--|-----|--------------------------------------|--|------------------|----------------------|-----------------------------|---|--|----------------------|
| | | | | | | T/V | | | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |
| | | | W | | None 85 | S E R RE | | T B | | |
| | | | H | | 150 190 / 225 | 2700 4000 5000 | | L R | | |