

HERITAGE 47 WINDOW ORDER/QUOTE FORM

Please tick for quote only

Page ___ of

Aluminium Direct Fax: 01453 827801 E-mail Orders: sop@real-aluminium.co.uk

Company Name (Acc No): _____

Signature: _____

Preferred Delivery Date: _____

Print Name: _____

Order Ref: _____

Date: _____ E-mail confirmation: _____

(Please tick) Fixed panes Dummy sashes

Note: 28mm glazing only
 : Sashes are internally beaded and fixed panes are externally beaded as standard unless Dummy sashes are selected
 : If a door is being coupled to a Heritage 47 window please note flush couplers are not compatible

Please Circle Items Required

Please Circle/Tick Items Required

(Q) = Selection may need to be upgraded to meet Part Q

Part Q Compliant: Y / N

Colour: White (G) / Grey (7016M) / Black (9005M) /
 Dual Grey Ex (M) & White Int (G)

Standard Handle Colour: White / Black / Grey / Satin Silver /
 Antique Black (Monkey tail) / (Bulb)

Art Deco Handle: Black / White / Brass / Satin Nickel

Trickle Vent Colour: White / Black / Grey / Silver / Grey on white
 Trickle vent widths 2700mm2 =300mm, 4000mm2=400mm and 5000mm2=600mm
 Drainage: Face / Concealed

Glass Supply: YES / Unglazed


Tick which is required:

Window Energy Rating B
 (1.2 centre pane U value 0.73 G value)

Window U Value 1.6
 (1.1 Centre pane U value)

Astragal Bar 25mm Flat bar
 (Please draw layout)

Note: Peg stays not available

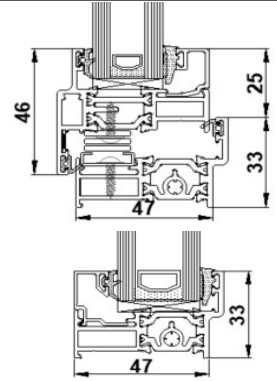

Hinge codes: S=Standard / E=Egress easy / R=Restrictor / RE=Restrictor Egress (TRI R90)

T/V Trickle vents requires 42mm add-on, fixed to the top of the window

Location	Design (viewed outside, please show T/vents and mullion/trans dimensions)	Qty	Sizes (mm) Including Cills & Add-ons		Cill	Hinge		Glass Spec (Tgh, Obs, Lead)	Addons 20mm 42mm (42mm required with trickle vents)		Special Requirements
						S	E		T	B	
			W		None	S	E		T		
					85	R	RE		B		
			H		150				L		
					190 / 225				R		
			W		None	S	E		T		
					85	R	RE		B		
			H		150				L		
					190 / 225				R		
			W		None	S	E		T		
					85	R	RE		B		
			H		150				L		
					190 / 225				R		
			W		None	S	E		T		
					85	R	RE		B		
			H		150				L		
					190 / 225				R		

Location	Design (viewed outside , please show T/vents and mullion/trans dimensions)	Qty	Sizes (mm) Including Cills & Add-ons		Cill	Hinge	Glass Spec (Tgh, Obs, Lead)	Addons 20mm 42mm (42mm required with t/vents)		Special Requirements
						T/V				
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		
			W		None 85	S E R RE		T B		
			H		150 190 / 225	2700 4000 5000		L R		